

-86°C ULT Freezer

DW-86L51J



Scope of Application :

This product is suitable for pharmaceutical users, the ULT freezer is for the storage of clinical samples and long-term storage of samples in blood stations, hospitals, epidemic prevention stations, scientific research institutes and biological products research institutes as key examples.

Innovative Design

- Ergonomic & User Friendly Design
- Hydrocarbon Energy Saving
- Safe, Secure and Reliable
- Microprocessor Control System
- Tool-free Removable Filter Design
- Multiple Data Ports

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

Product Advantages




Auto-cascade Hydrocarbon (HC) Refrigeration Technology

Utilizing imported auto-cascade hydrocarbon compressor, with superior refrigeration effect and energy saving



Microprocessor Control System

Microprocessor control, with temperature display precision at 0.1°C. Internal temperature is adjustable from of -40°C ~ -86°C

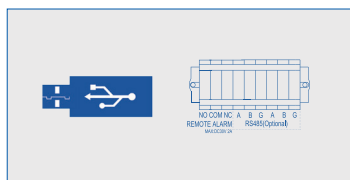

Multiple Ports

Enables users to download historical temperature data for the past 15 years
Equipped with remote alarm function and RS485 port



Filter Design

Tool-free removable filter design, easy and quick to clean the filter



Excellent Doors Seals

Total six gaskets to safeguard the freezer temperature, including a 70mm insulation layer, a 25mm vacuum VIP and 4 layers of silicone seal



Stainless Steel Inner Door

Prevent loss of inside cold air and easy to clean




Ergonomic Design

Unique hook slide, which allows users to open and close with one hand

Internal Lock

Standard internal lock with 4 keys, which can be managed by different people

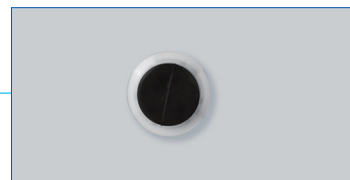

Porthole

One porthole as standard, allows for independent testing of cabinet temperature

Technical Parameters

Model	Power Supply (V/Hz)	Power (W)	Effective Volume (L)	Temperature (°C)	External Dimensions (W*D*H)(mm)	Internal Dimensions (W*D*H)(mm)	Weight (kg)	Sample Size (2ml)	Certification
DW-86L51J	115/60	350	51	-40~-86	532*640*806	330*481*316	86	3000	UL